

LINESCAPES PENDANT VERTICAL

Family of floor, ceiling and wall elements, efficient with an highly versatile linear luminous output. Body in aluminium extruded and opal white polycarbonate diffuser. Horizontal cantilever wall version supplied with kit for connection with remote driver. White or black finishing with elements in grey painted on the floor and wall versions.



LED 2700K

LAMPING

| | |
|-------------------|---|
| Source | linear LED |
| Total power | 12W |
| Emission | diffused orientable |
| Tension | 110/240V |
| Color temperature | 2700K |
| Luminous flux | 475lm |
| Typ CRI | 85 |
| Energy class | A+ |
| Materials | Aluminium + PC + ABS |
| Notes | cable length max 3m, orientable 360°, side emission |

Codes

LIN LW2 59

Structure/Diffuser


white/white

PACKAGE

Package 01

Dimension: 15x20x130 cm / Gross weight: 2,7 kg

Certificazioni

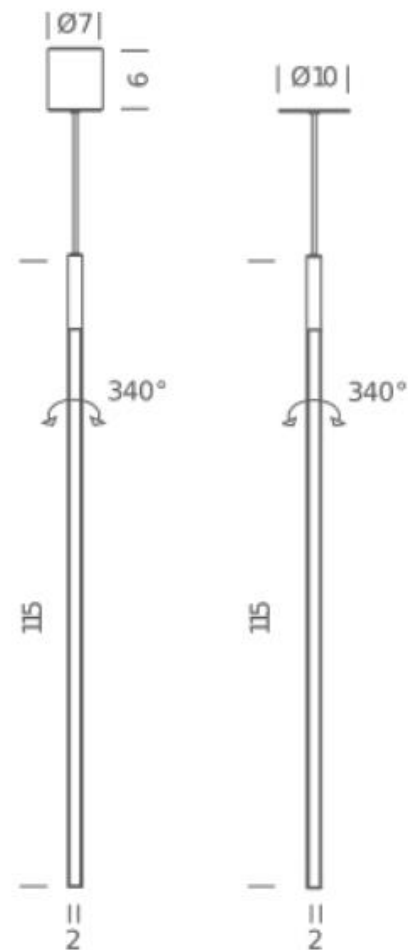

LED 3000K

LAMPING

| | |
|-------------------|---|
| Source | linear LED |
| Total power | 12W |
| Emission | diffused orientable |
| Tension | 110/240V |
| Color temperature | 3000K |
| Luminous flux | 475lm |
| Typ CRI | 85 |
| Energy class | A+ |
| Materials | Aluminium + PC + ABS |
| Notes | cable length max 3m, orientable 360°, side emission |

Codes

LIN LWW 59

Structure/Diffuser


white/white

PACKAGE

Package 01

Dimension: 15x20x130 cm / Gross weight: 2,7 kg

Certificazioni

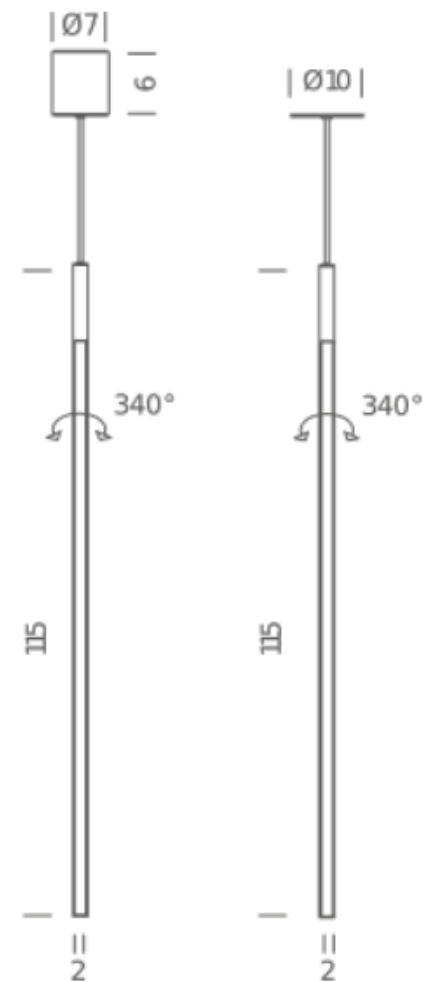

LED RECESSED 2700K

LAMPING

| | |
|-------------------|--|
| Source | linear LED |
| Total power | 19W |
| Emission | diffused orientable |
| Switching | dimnable 1-10V |
| Tension | 110/240V |
| Color temperature | 2700K |
| Luminous flux | 1125lm |
| Typ CRI | 85 |
| Energy class | A+ |
| Materials | Aluminium + PC + ABS |
| Notes | cable length max 3m, orientable 360°, recessed hole Ø8xHmin 4cm, side emission, DALI version on request |

Codes

LIN LW2 5A

Structure/Diffuser


white/white

PACKAGE

Package 01

Dimension: 15x20x130 cm / Gross weight: 2,7 kg

Certificazioni

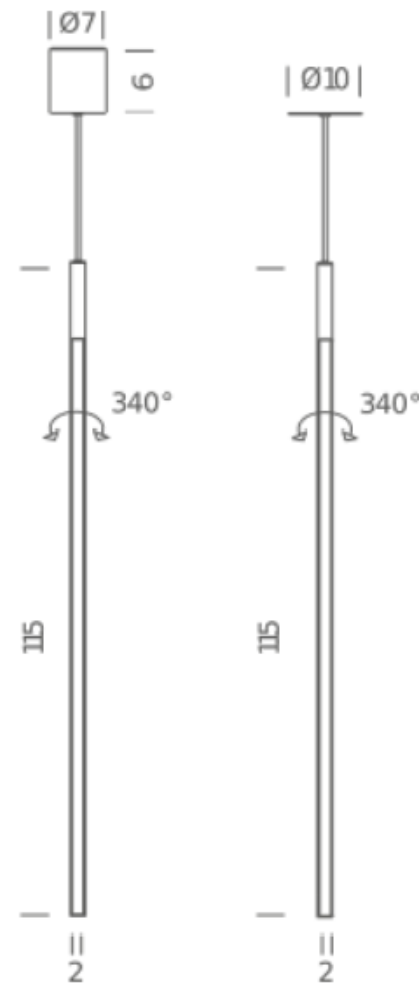

LED RECESSED 3000K

LAMPING

| | |
|-------------------|--|
| Source | linear LED |
| Total power | 19W |
| Emission | diffused orientable |
| Switching | dimmable 1-10V |
| Tension | 110/240V |
| Color temperature | 3000K |
| Luminous flux | 1125lm |
| Typ CRI | 85 |
| Energy class | A+ |
| Materials | Aluminium + PC + ABS |
| Notes | cable length max 3m, orientable 360°, recessed hole Ø8xHmin 4cm, side emission, DALI version on request |

Codes

LIN LWW 5A

Structure/Diffuser

white/white

PACKAGE

Package 01

Dimension: 15x20x130 cm / Gross weight: 2,7 kg

Certificazioni

